

Vacuum Level Adjustment Procedure

Note: Vacuum Relief Valve is factory set at 10" Hg. Perform "Vacuum Level Adjustment" Procedure if adjustment is needed. Never adjust the VRV above 12" Hg on the vacuum gauge.




- A. Rotate barrel clockwise to increase "Hg.
- B. Rotate barrel counterclockwise to decrease "Hg.



Vacuum Relief Valve Filter



Pull filter out of Vacuum Relief Valve end cap to clean or replace.



LIMITED WARRANTY SCOPE OF WARRANTY

Midmark Corporation ("Midmark") warrants to the original purchaser its new ClassicSeries™ products and components (except for components not warranted under "Exclusions") manufactured by Midmark to be free from defects in material and workmanship under normal use and service. Midmark's obligation under this warranty is limited to the repair or replacement, at Midmark's option, of the parts or the products the defects of which are reported to Midmark within the applicable warranty period and which, upon examination by Midmark, prove to be defective.

APPLICABLE WARRANTY PERIOD

The applicable warranty period, measured from the date of installation for the original user, shall be:
• ClassicSeries™ Wet Ring Vacuums: Five (5) years or 10,000 usage hours (whichever comes first)

EXCLUSIONS

This warranty does not cover and Midmark shall not be liable for the following: (1) repairs and replacements because of misuse, abuse, negligence, alteration, accident, freight damage, or tampering; (2) products which are not installed, used, and properly cleaned as required in the Midmark "Installation" manual and or "maintenance" guide for this applicable product; (3) products considered to be of a consumable nature; (4) accessories or parts not manufactured by Midmark; (5) charges by anyone for adjustments, repairs, replacement parts, installation, or other work performed upon or in connection with such products which is not expressly authorized in writing in advance by Midmark.

EXCLUSIVE REMEDY

Midmark's only obligation under this warranty is the repair or replacement of defective parts. Midmark shall not be liable for any direct, special, indirect, incidental, exemplary, or consequential damages or delay, including, but not limited to, damages for loss of profits or loss of use.

NO AUTHORIZATION

No person or firm is authorized to create for Midmark any other obligation or liability in connection with the products.

THIS WARRANTY IS MIDMARK'S ONLY WARRANTY AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED. MIDMARK MAKES NO IMPLIED WARRANTIES OF ANY KIND INCLUDING ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT OF DEFECTIVE PARTS.



ClassicSeriesTM Wet-Ring Vacuums Maintenance Guide

To ensure years of reliable service, follow the maintenance schedule outlined in this guide. If service is required, contact your authorized Midmark dealer.

Dealer (name / phone):		
Model Number:		
Serial Number:		
Date of Purchase:		

Annual Maintenance Log		
Date:	Services Performed:	Technician

10546500 Rev. E (2/12)

Daily

A. Clean Vacuum Piping System.

Clean piping system with a non-foaming vacuum system cleaner. Midmark recommends Precision Clense™, Order No. 77000570.

B. Clean Vacuum Inlet Strainer.

Turn vacuum "OFF". Remove, replace and or clean filter bowl, screen and gasket. Reassemble. Turn vacuum "ON".

Annually

A. Clean and or Replace Vacuum Relief Filter.

Pull filter out of end cap. Blow off filter and or replace if damaged. Replace filter in VRV end cap.

B. Clean Water Inlet Strainer.

Turn vacuum "OFF". Remove cap on "Y" strainer housing and pull out the wire intake strainer. Rinse with water and blow off. Replace strainer and cap. Turn vacuum "ON".


C. Clean / Dust Vacuum Pump(s).

Wipe with a clean cloth to remove dust & debris.

Midmark Corporation 60 Vista Drive Versailles, Ohio 45380 1-800- Midmark (643-6275) www.midmark.com

Note - Recycler Models Only

If you have low to no suction due to a clog by residue building up over time, there is a feature on vacuum to keep it running until a service technician can troubleshoot the problem. Turn the water by-pass valve to the OPEN position. This will by-pass the recycler and may keep the pump running.

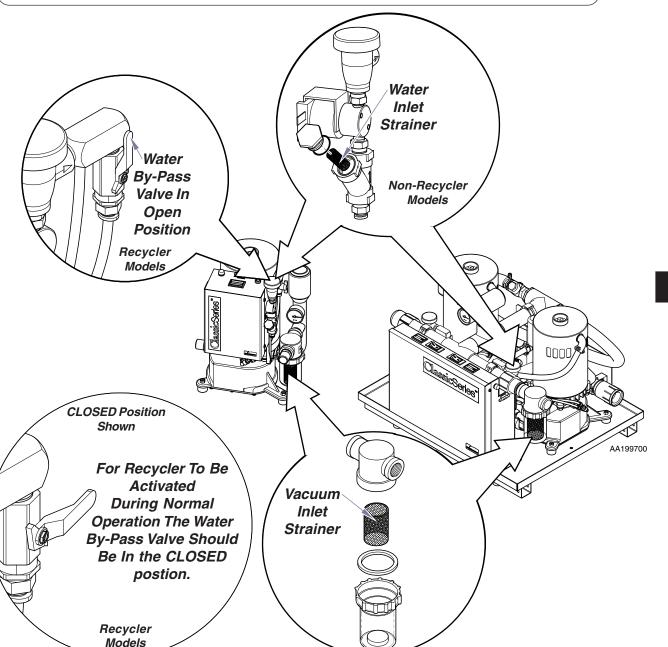

Maintenance Kits



Vacuum Relief Valve Filter
Order #: 62935601
Includes:

Filter



Vacuum Inlet Strainer Order #: Single Models – 62937301 Twin Models - 77005155

Includes:

• Filter bowl, screen and o-ring.



Dispos-A-Bowl Order#: Single Models – 77005167 Twin Models - 77005168

Includes:

• Container, lid and red safety tape.

Accessories



Exhaust Silencer Order #: 77000040

Includes:

Exhaust Silencer



Mineral Reducer Kit Order #: AVA8200

Includes:

 Installation instructions, housing, cartridge, all necessary mounting and installation hardware.

Order #: PFM8200

Includes:

· Cartridge for Mineral Reducer.