Midmark® ClassicSeries Wet-Ring Vacuums











PROVEN. RELIABLE. TRUSTED.

Midmark ClassicSeries Wet-Ring Vacuums provide dependable performance in a compact, space-saving design—giving dental teams the reliable suction they need for optimal patient care without sacrificing space. These vacuums combine the best features and proven technologies of our trusted legacy models into one integrated solution.

Performance Highlights:

- High-output, proven performance delivers reliable suction
- Exclusive internal water recycling helps minimize water usage
- Optional water recycling bypass valve helps prevent mineral-related wear
- Sound-reducing mufflers support a quieter environment
- 100% long-term burn-in testing helps ensure system reliability
- Durable aluminum bronze construction resists corrosion
- Stainless steel motor shafts offer added strength
- Heavy-duty 1.25 HP and 2 HP motors enhance performance and longevity
- Industry-leading 5-year/10,000hour full-product warranty builds confidence


- O1 The efficient intake manifold promotes smooth airflow, enhancing vacuum performance and reliability.
- 02 Independent on/off switches and hour meters for each twin model allows for operational flexibility and service tracking.
- Ouick-connect hose fittings enable tool-free service, while the water recycler bypass valve helps protect against mineral buildup.

Save Up to 3x More Fresh Water

Compared to vacuums without water recycling

You can depend on Midmark ClassicSeries Wet-Ring Dental Vacuums for the reliable performance you need.

WATER + ENERGY COSTS OVER TIME*

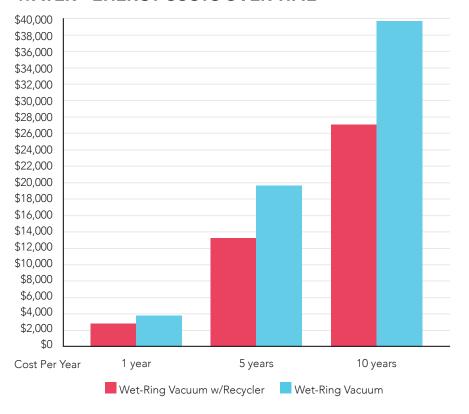

ACCESSORIES





- 01 The Precision Clense™ Plus Evacuation System Cleaner helps keep your vacuum clean and deodorized.
- O2 The Dispos-A-BowlTM vacuum inlet strainer provides a safe and effective solution for collecting and disposing of vacuum waste.
- 03 The Mineral Deposit Reducer Kit is recommended for offices in hard water areas to prevent scale buildup and extend the life of the vacuum system.
- *2,000 hours/yr (40 hours/wk x 50 wks) comparing 10-user wet-ring (240,000 gal/yr) and 10-user wet-ring with recycler (80,000 gal/yr vacuums. Includes costs for water and electricity (using the avg. US water cost of \$7.89/1,000 gal¹ and avg. US energy cost of \$0.13 per kWh²).

CLASSIC SERIES SPECIFICATIONS

| Model/ Order No. | CV3 (SINGLE) | CV3R (SINGLE) | CV5 (SINGLE) | CV5R (SINGLE) | CV6 (TWIN) | CV6R (TWIN) | CV10 (TWIN) | CV10R (TWIN) |
|--|-----------------------|-----------------------|-------------------|-------------------|------------------------|------------------------|------------------------|------------------------|
| User Capacity | 3 | 3 | 5 | 5 | 6 | 6 | 10 | 10 |
| Water Recycling | No | Yes | No | Yes | No | Yes | No | Yes |
| Horsepower | 1.25 hp | 1.25 hp | 2 hp | 2 hp | 2.5 hp | 2.5 hp | 4 hp | 4 hp |
| Voltage (Single Phase) / Frequency | 115/230 V 50/60 Hz | 115/230 V 50/60 Hz | 230 V 50/60 Hz | 230 V 50/60 Hz | 115/230 V 50/60 Hz | 115/230 V 50/60 Hz | 230 V 50/60 Hz | 230 V 50/60 Hz |
| Amperage | 15.0/7.5 A | 15.0/7.5 A | 13 A | 13 A | 15.0/7.5 A x2 | 15.0/7.5 A x2 | 13 A x2 | 13 A x2 |
| Circuit Breaker | 20 A | 20 A | 20 A | 20 A | 20 A x 2 |
| Overall Size (H x W x D) | 15" x 12" x 13" | 15" x 12" x 13" | 17" × 12" × 13" | 17" x 12" x 13" | 18.5" × 25.5" × 20" |
| Shipping Weight | 70 lb | 70 lb | 76 lb | 76 lb | 188 lb | 188 lb | 208 lb | 208 lb |





