
Install Handpieces



Equipment Alert


Complete manufactures instructions for

"Infection Control / Sterilization found

in the documentation included with the

premature failure of handpieces.

handpieces. Failure to do this will cause





Insert CD, then select Product Registration from the menu.

Maintenance Kits



Owater Bottle Gasket
Order #: 014-0176-52

Plastic Muffler Filter Order#: 002-1149-00

VA1443

Operating & Care Guide VetPro® 5000 Mobile Dental Delivery System



The operation of the VetPro® 5000 Wall/ Mobile Dental Delivery System is restricted to use by veterinary professionals.

This guide outlines basic care and maintenance of the VetPro® 5000. The enclosed CD provides additional instructions on operation and care. If service is required, contact your authorized Midmark dealer.

Calling for Service

If service is required, contact your Midmark dealer.

To contact Midmark directly:

1-800-Midmark (1-800-643-6275) 8:00am until 5:00 pm Monday through Friday (EST)

Midmark Corporation 60 Vista Drive Versailles, OH 45380-0286 Phone: 937-526-3662

Fax: 937-526-5542 www.midmark.com



To Flush Delivery System...

- A) Remove all handpieces that use water.
- B) Open water needle valve.
- C) Turn foot control toggle switch to WET.
- D) Hold end of tubing over a container and press foot control for 30 seconds.

 Then press and hold flush button for 30 seconds. Repeat (step D) for all handpieces.
- E) Press and hold syringe buttons (air & water) for 30 seconds.
- F) Install newly disinfected handpieces.
- G) Refill water bottle.

Note: When performing "Flush" procedure at the end of the day. Refer to: User's Guide 003-1950-00 on CD or www.Midmark.com for procedure.)

At the beginning of each work day...

- Fill water bottles with fresh distilled water.
- Flush handpieces.



Daily

After Each Procedure

Handpieces and syringe tip should be changed or

disinfected between each patient according to

manufacturer's instructions.

B. Flush Delivery System.

A. Clean System

C. Fill Water Bottle.


A. Clean.

- Disinfect handpieces according to manufacturer's instructions.
- Wipe down delivery equipment with disinfectant.
- B. Bleach Flush Delivery System
 (End of Day Only Refer to: User's Guide
 003-1902-00 on CD or www.Documark.com for
 procedure.)
- C. Drain Air Storage Tank

Periodically

A. Check air/oil separator fluid level.

• Change Gauze when saturated. Use 2 x 2 Gauze pads.

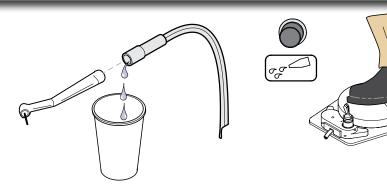


Gauze

Cup

To Drain Air Storage Tank..

Hold absorbant cloth under drain. Open drain valve by turning Counter-clockwise. Tighten valve after tank empties of air and condensation.



- A) Turn master On/Off switch Off.
- A) Unsnap cup.
- B) Dispose of saturated gauze.
- C) Disinfect cup.
- D) Install new gauze, then reinstall cup.

